


# Power supply ZL-25-01

- ✓ Output power supply 2x24 V DC
- ✓ Maximum output current 2 × 50 mA
- ✓ Indication of presence of output voltage
- ✓ Permanently resistant to short circuits and excess voltage
- ✓ Casing can be fitted on a standard rail (TS35, TS32)

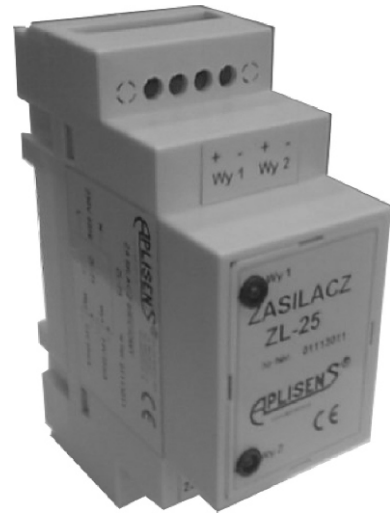

## Applications and functions


The ZL-24-01 power supply is used with a 220 V, 50 Hz AC network supply to power devices requiring direct current (output voltage in the range 5 ÷ 30 V, standard value 24 V).

The product is available with two voltage DC output 2x24 V DC (2x50mA). To increase output current both channels should be parallel connected.

The ZL-25-01 is typically used to power devices requiring a 24 V DC power supply.

## Technical parameters

<b>Input voltage</b>	230 V, 50 Hz (±10%)
<b>Output voltage</b>	2x24 V DC (special versions: 5 ÷ 30 V)
<b>Maximum load current</b>	2 × 50 mA (current limitation 70 mA per circuit)
<b>Galvanic separation</b>	network transformer
<b>Strength test parameters</b>	1.5 kV AC, 50 Hz, 1 min
<b>Ambient temperature</b>	5..60°C
<b>Casing</b>	Z106 (KRADEX)
<b>Ingress protection rating</b>	IP 20
<b>Weight</b>	0.4 kg

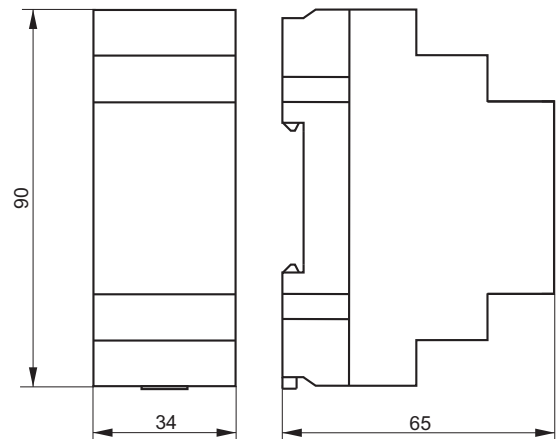

## Ordering procedure

Standard version: **ZL-25-01**

Special version: **ZL-....-01**

Output voltage (value from 5 to 30 V)

## Electrical diagrams

